



ART. 9450.102

Hose reels with ABS drum - s. 430-450-530

Enclosed fixed hose reel in ABS, s.430, for air-water, 20 bar, with black rubber hose 18 m, \varnothing 3/8"



FLUIDS

FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | MANUFACTURING INDUSTRY

CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

| Features | UM | Value |
|-------------------------------|-------------------|-----------------------------|
| Pressure | bar | 20 |
| Compatible fluids | | air - water |
| Swivel joint | | brass |
| Seals | | Viton® |
| Characteristic | | fixed |
| Material | | painted steel with ABS drum |
| Couplings | | zinc plated steel |
| Hose | | 995.218 |
| \varnothing and hose length | \varnothing - m | 3/8" - 18 |
| Inlet | | G 1/2" (f) |
| Outlet | | G 3/8" (m) |
| Reel flow path | | brass - zinc plated steel |
| Internal drum width | mm | 140 |

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.



Overall dimensions

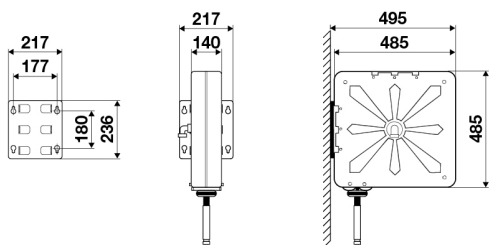

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2020 All rights reserved to RAASM S.p.A.