

## TRIP AND LOCKOUT RELAYS (II)

Model	BF-4RP	BJ-8RP
-------	--------	--------





Applications

Intended for tripping and locking applications where high quality requirements in operating time and breaking capacity are needed, with manual reset.

Construction characteristics

Contacts no.	4 Changeover	8 Changeover
--------------	--------------	--------------

Connections

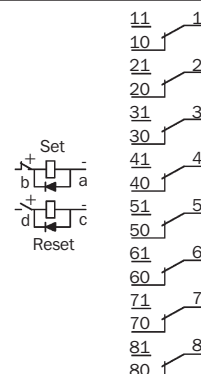

Options

Options are not available

Weight (g)	300	600
------------	-----	-----

Dimensions (mm)	45 x 45 x 96,5 (F short Type)	90 x 50 x 100,5 (J short Type)
-----------------	-------------------------------	--------------------------------

Coil characteristics

Standard voltages <sup>(1)</sup>	24, 48, 72, 110, 125, 220 Vdc 63,5, 110, 127, 230 Vac (50-60 Hz)
----------------------------------	---

Voltage range	+10% -20% U <sub>N</sub>
---------------	--------------------------

Pick-up voltage (20°C)	See pick-up voltage / temperature curves for Latching relays
------------------------	--

Consumptions only in the change-over	23 W	35,5 W
--------------------------------------	------	--------

Operating time

Pick-up time	<10 ms (Vdc) <13 ms (Vac)	<10 ms (Vdc) <20 ms (Vac)
--------------	---------------------------	---------------------------

Contacts

Contact material	AgNi
------------------	------

Distance between contacts	1,8 mm
---------------------------	--------

Permanent current	10 A
-------------------	------

Instantaneous current	80 A during 200 ms / 200 A during 10 ms
-----------------------	---

Max. making capacity	40 A / 0,5 s / 110 Vdc
----------------------	------------------------

Breaking capacity	See breaking capacity curves (1 contact configuration)
-------------------	--

Max. breaking capacity	See value for 50,000 operations
------------------------	---------------------------------

U <sub>max</sub> opened contact	250 Vdc / 400 Vac
---------------------------------	-------------------

Performance data

Mechanical endurance	10 <sup>7</sup> operations
----------------------	----------------------------

Operating temperature	-40°C +70°C
-----------------------	-------------

Storage temperature	-40°C +70°C
---------------------	-------------

Max. operating humidity	93% / +40°C
-------------------------	-------------

Operating altitude <sup>(2)</sup>	<2000 m
-----------------------------------	---------

<sup>(1)</sup> Other voltage upon request

<sup>(2)</sup> Ask for higher altitudes

