

Single Channel Hall Effect Speed Sensor DSF xx10.xx MxV / PxV / SxV



Product ID

Type #	Product #	Drawing #
DSF 1210.00 MTV (5m)	374Z-03970	4-111.478
DSF 1210.00 MTV (L=...m)	374Z-03971	4-111.478
DSF 1210.00 SHV (2m)	374Z-03869	4-110.428
DSF 1210.00 SHV (30m)	374Z-03879	4-110.428
DSF 1210.00 SHV (5m)	374Z-03880	4-110.428
DSF 1210.00 SHV (L=...m)	374Z-03924	4-110.428
DSF 1210.00 STV (5m)	374Z-03870	4-110.428
DSF 1210.00 STV (L=...m)	374Z-03923	4-110.428
DSF 1210.01 PHV (0,36m)	374Z-04903	3-112.475
DSF 1210.06 PHV	374Z-05512	3-114.319 Rev.3
DSF 1410.00 SHV (2m)	374Z-03927	4-111.496
DSF 1410.00 SHV (5m)	374Z-03928	4-111.496
DSF 1410.00 SHV (L=...m)	374Z-03929	4-111.496
DSF 1410.00 STV (5m)	374Z-03925	4-111.496
DSF 1410.00 STV (L=...m)	374Z-03926	4-111.496
DSF 1410.01 SHV (10m)	374Z-04218	4-111.809
DSF 1610.00 MTV S151	374Z-03966	4-110.794 S151
DSF 1610.00 SHV (5m)	374Z-03933	4-111.498
DSF 1610.00 STV (5m)	374Z-03930	4-111.498
DSF 1810.00 MTV (5m)	374Z-03976	4-111.481
DSF 1810.00 SHV (2m)	374Z-03871	4-110.687
DSF 1810.00 SHV (5m)	374Z-03882	4-110.687
DSF 1810.00 SHV (L=...m)	374Z-03936	4-110.687
DSF 1810.00 STV (5m)	374Z-03872	4-110.687
DSF 1810.00 STV (L=...m)	374Z-03935	4-110.687
DSF 1810.02 PTV (0,4m)	374Z-04941	4-112.558
DSF 2210.00 MTV (5m)	374Z-03978	4-111.482
DSF 2210.00 MTV (L=...m)	374Z-03979	4-111.482
DSF 2210.00 SHV (2m)	374Z-03874	4-110.777
DSF 2210.00 SHV (5m)	374Z-03877	4-110.777
DSF 2210.00 SHV (L=...m)	374Z-03938	4-110.777
DSF 2210.00 STV (5m)	374Z-03875	4-110.777
DSF 2210.00 STV (6m)	374Z-03876	4-110.777
DSF 2210.00 STV (L=...m)	374Z-03937	4-110.777
DSF CD10.00 SHV (2m)	374Z-05392	4-113.862
DSF EH10.00 STV (5m)	374Z-04360	4-111.915
DSF EH10.08 P1HV	374Z-05028	112.778 Rev.1
DSF EH10.08 SHV (5m)	374Z-04836	4-112.350
DSF EH10.11 SHV (2m)	374Z-05073	4-112.914
DSF EH10.15 SHV (5m)	374Z-05511	4-114.317 Rev.3
DSF EH10.16 SHV	374Z-05716	115.031 Rev.0

General

Function	The sensors DSF are suitable, in conjunction with a pole wheel, for generating square wave signals proportional to rotary speeds. They have a dynamic behaviour, so that pulse generation is guaranteed down to a speed corresponding to a frequency of 0.05 Hz. The monitoring elements consist of an magnetically biased hall effect semiconductor followed by an short-circuit proof push-pull output stage. The sensor function is independent of the rotational orientation of the sensor axis.
Certification	The DSF sensors are approved by Germanischer Lloyd (GL): Certificate 17332-00 HH

Technical data

Supply voltage	10 V to 30 V, protected against transient overvoltages and reverse polarity
Current consumption	Max. 14 mA (without load)
Signal output	Square wave signals from push-pull stage, DC-coupled to the supply (negative pole = reference voltage) Push-pull outputs : $I_{max} = \pm 20$ mA, $U_{low} < 2.5$ V, $U_{high} > U_{supply} - 3.5$ V The outputs are short circuit proof and protected against reverse polarity.
Frequency range	0.05 Hz ... 20 kHz
Electromagnetic compatibility (EMC):	According to Directive 2004/108/EC, EN 61000-6-2 and 61000-6-4: <ul style="list-style-type: none"> • Electrostatic discharge into housing, cable shield and wires: up to ± 4 kV peak according to IEC 61000-4-2, severity level 2 • Radiated electromagnetic field: up to 30 V/m, 50% AM, 1 kHz in the range of 1 MHz to 1000 MHz according to IEC 61000-4-3, severity level 3 • Fast electrical transients/bursts, coupled to sensor cable with a capacitive coupling clamp: up to ± 4 kV peak according to IEC 61000-4-4, severity level 4
Housing	Stainless steel 1.4305, front side sealed hermetically and resistant against splashing water, oil, conducting carbon- or ferrous dust and salt mist. Electronic components potted in chemical and age proof synthetic resin. Max. allowable pressure on sensor head: 10 bar Dimensions according to drawing. Max. tightening torque: 12 Nm for M12x1 25 Nm for M14x1 35 Nm for M16x1 50 Nm for M18x1 75 Nm for M22x1
Pole wheel	Toothed wheel of a magnetically permeable material (e.g. Steel 1.0036) Minimum tooth width 10 mm Side offset < 0.2 mm Eccentricity < 0.2 mm
Air gap between sensor and pole wheel	Air gap between pole wheel (involute gear) and sensor housing: <ul style="list-style-type: none"> • Module 1: 0.2...1.0 mm • Module 2: 0.2...2.5 mm • Module 3: 0.2...3.5 mm • Module 4 and coarser: 0.2...4.5 mm
Insulation	Housing and electronics galvanically separated (500 V/50 Hz/ 1 min)
Protection class	IP68 (head) and IP67 (cable outlet)
Vibration immunity	5 g in the range of 5 Hz ... 2000 Hz
Shock immunity	50 g for 20 ms, half sine wave
Temperature	Operating temperature of sensor: <ul style="list-style-type: none"> • Version H: -40° ... +125°C • Version T: -25° ... +85°C Check properties of cable and protective conduits.

Connection type

Sensor type	Connection type	Jaquet part number
DSF 1210.00 MTV (5m)	Cable with protective conduit	824L-35665 (cable) 825G-36148 (conduit)
DSF 1210.00 MTV (L=...m)	Cable with protective conduit	824L-35665 (cable) 825G-36148 (conduit)
DSF 1210.00 SHV (2m)	Cable	824L-35053
DSF 1210.00 SHV (30m)	Cable	824L-35053
DSF 1210.00 SHV (5m)	Cable	824L-35053
DSF 1210.00 SHV (L=...m)	Cable	824L-35053
DSF 1210.00 STV (5m)	Cable	824L-35665
DSF 1210.00 STV (L=...m)	Cable	824L-35665
DSF 1210.01 PHV (0,36m)	Cable with integrated connector	824L-33024 (cable) 820P-36527 (connector)
DSF 1210.06 PHV	Cable with integrated connector	824L-35053 (cable) 820A-36859 (connector)
DSF 1410.00 SHV (2m)	Cable	824L-35053
DSF 1410.00 SHV (5m)	Cable	824L-35053
DSF 1410.00 SHV (L=...m)	Cable	824L-35053
DSF 1410.00 STV (5m)	Cable	824L-35665
DSF 1410.00 STV (L=...m)	Cable	824L-35665
DSF 1410.01 SHV (10m)	Cable	824L-35053
DSF 1610.00 MTV S151	Cable and cable gland	824L-35665 (cable) CF-Pg9 (cable gland)
DSF 1610.00 SHV (5m)	Cable	824L-35053
DSF 1610.00 STV (5m)	Cable	824L-35665
DSF 1810.00 MTV (5m)	Cable with protective conduit	824L-35665 (cable) 825G-30924 (conduit)
DSF 1810.00 SHV (2m)	Cable	824L-35053
DSF 1810.00 SHV (5m)	Cable	824L-35053
DSF 1810.00 SHV (L=...m)	Cable	824L-35053
DSF 1810.00 STV (5m)	Cable	824L-35665
DSF 1810.00 STV (L=...m)	Cable	824L-35665
DSF 1810.02 PTV (0,4m)	Cable with integrated connector	824L-35053 (cable) 820A-36859 (connector)
DSF 2210.00 MTV (5m)	Cable with protective conduit	824L-35665 (cable) 825G-30924 (conduit)
DSF 2210.00 MTV (L=...m)	Cable with protective conduit	824L-35665 (cable) 825G-30924 (conduit)
DSF 2210.00 SHV (2m)	Cable	824L-35053
DSF 2210.00 SHV (5m)	Cable	824L-35053
DSF 2210.00 SHV (L=...m)	Cable	824L-35053
DSF 2210.00 STV (5m)	Cable	824L-35665
DSF 2210.00 STV (6m)	Cable	824L-35665
DSF 2210.00 STV (L=...m)	Cable	824L-35665
DSF CD10.00 SHV (2m)	Cable	824L-35053
DSF EH10.00 STV (5m)	Cable	824L-35665
DSF EH10.08 P1HV	Cable with integrated connector	824L-32832 (cable) 820P-36963 (connector)
DSF EH10.08 SHV (5m)	Cable	824L-35053
DSF EH10.11 SHV (2m)	Cable	824L-36222
DSF EH10.15 SHV (5m)	Cable	824L-35053
DSF EH10.16 SHV	Cable	824L-35053

Cables

Jaquet cable type	Properties
824L-32832	FEP Teflon cable, 3-wire, 0.75 mm ² (AWG 19), outer-Ø max. 5.9 mm, bending radius min. 85 mm, screened (metal net), black Operating temperature: -90 °C to +200 °C
824L-33024	PTFE Teflon cable, 3-wire, 0.6 mm ² (AWG 20), outer-Ø max. 4.7 mm, bending radius min. 70 mm, screened (metal net), white Operating temperature: -90 °C to +260 °C
824L-35053	FEP Teflon cable, 4-wire (brown wire is not connected), 0.2 mm ² (AWG 24), outer-Ø max. 4.2 mm, bending radius min. 60 mm, screened (metal net), white Operating temperature: -100 °C to +150 °C
824L-35665	PVC cable, 3-wire, 0.23 mm ² (AWG 24), outer-Ø max. 4.2 mm, bending radius min. 60 mm, screened (metal net), grey Operating temperature: -20 °C to +80 °C
824L-36222	FEP Teflon cable, 4-wire (white wire is not connected), 0.6 mm ² (AWG 20), outer-Ø max. 4.7 mm, bending radius min. 24 mm, screened(metal net), white Operating temperature: -60 °C to +150 °C

Connectors

Jaquet connector code	Manufacturer code
820A-36859	Escha WASS4 Plug-and-socket connection: IP67 Operating temperature: -30 °C to +90 °C
820P-36527	AMP 282105-1 Plug-and-socket connection: IP67 Operating temperature: -40 °C to +125 °C
820P-36963	Deutsch DT06-3S-EP06 Plug-and-socket connection: IP67 Operating temperature: -40 °C to +125 °C


Protective conduit

Jaquet code	Properties
825G-30924	Cold strip DC 03 acc. to EN 10139, galvanized, Fe/Zn3, sheating: PVC Weatherproof, watertight, highly resistant to seawater, acids and oils, free of silicone and cadmium, very flexible, stretch resistant, crush resistant, dark grey Operating temperature: -25 °C to +80 °C
825G-36148	Cold strip DC 03 acc. to EN 10139, galvanized, Fe/Zn3, sheating: Polyurethan (PU) Absolutely oil- benzine- and grease resistant, widely resistant to solvents and acids, free of halogen, silicone and cadmium, high tenacity and abrasion resistance, very flexible, microbic resistant, flame resistant, metallic blue Operating temperature: -40 °C to +100 °C

Further Information

Safety	All mechanical installations must be carried out by an expert. General safety requirements have to be met.
Connection	<p>The sensors must be connected according to the dimensional drawing. Sensor wires are susceptible to radiated noise. Therefore, the following points have to be considered when connecting a sensor:</p> <p>The sensor wires must be laid as far as possible from large electrical machines. They must not run parallel in the vicinity of power cables.</p> <p>The maximum permissible cable length is dependent upon the sensor voltage, the cable routing, along with cable capacitance and inductance. However, it is advantageous to keep the distance between sensor and instrument as short as possible. The sensor cable may be lengthened via a terminal box located in an IP20 connection area in accordance with EN 60529.</p>

Typical connection (check dimensional drawing):

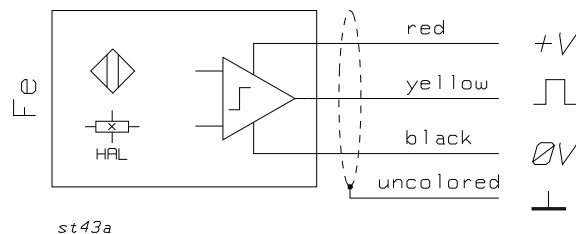

Installation	<p>The sensor has to be aligned to the pole wheel according to the sensor drawing independent of its rotational orientation. Deviations in positioning may affect the performance and decrease the noise immunity of the sensor. During installation, the smallest possible pole wheel to sensor gap should be set. The gap should however be set to prevent the face of the sensor ever touching the pole wheel. A sensor should be mounted with the middle of the face side over the middle of the pole wheel. Dependent upon the wheel width, a certain degree of axial movement is permissible. However, the middle of the sensor must be at minimum in a distance of 3 mm from the edge of the pole wheel under all operating conditions.</p> <p>A solid and vibration free mounting of the sensor is important. Eventual sensor vibration relative to the pole wheel can induce additional output pulses. The sensors are insensitive to oil, grease etc. and can be installed in arduous conditions. During installation, the smallest possible pole wheel to sensor gap should be set. The gap should however be set to prevent the face of the sensor ever touching the pole wheel. Within the air gap specified the amplitude of the output signals is not influenced by the air gap.</p> <p>Particular mounting instructions for DSF 1610.00 MTV S151: The detecting element is placed on the lateral side of the sensor housing (see dimensional drawing). Its position is marked on the surface. The applicable maximal airgap is reduced by 0.6 mm with respect to the data mentioned in this operating instructions. At the cable output of the housing a protective conduit can be mounted around the sensor cable. This is not part of the delivery.</p>
Maintenance	Product cannot be repaired.
Transport	Product must be handled with care to prevent damage of the front face.
Storage	Product must be stored in dry conditions. The storage temperature corresponds to the operation temperature.
Disposal	Product must be disposed of properly, it must not be disposed as domestic waste.